



EcoProfile of recycled PP flakes EU27+3, cradle-to-gate, post- consumer

Jonas Hoffmann, Max Bringmann, Andreas Ciroth
GreenDelta GmbH
May 2025

LCA method overview	
Background database	Ecoinvent v3.10
Dataset type	Cut-off, unit processes
Declared unit	'Production of 1 kg of mechanically recycled PP flakes'
ISO conformity	ISO 14040 and 14044 structure, internal review
LCIA method	Environmental Footprint 3.1
Software	openLCA 2.4
System boundary	Cradle-to-gate



1 BACKGROUND INFORMATION

- The primary purpose of this document is to present an average life cycle inventory (LCI) and impact assessment (LCIA) for mechanically recycled polypropylene (rPP) flakes as result of the Horizon Project PRIMUS. The project seeks to provide a comprehensive understanding of and data for the environmental impacts associated with mechanically recycled plastics.
- rPP is a widespread material known for its thermal and mechanical properties, commonly used in packaging, automobiles and consumer goods. The usage of mechanically recycled PP reduces the use of fossil fuels and energy compared to the production of primary PP.
- Mechanical recycling of WEEE plastics waste involves collection, sorting, shredding, sorting to remove non-plastics (via magnetic separation and eddy-current separation) grinding, cleaning and drying to produce rPP flakes.
- The documentation of the method followed in the herein presented EcoProfile follows the main principles of the ISO 14040-14044 standards and was internally reviewed by PlasticRecyclersEurope and experts from the VTT Technical Research Centre of Finland. It is intended for LCA practitioners and sustainability researchers and stakeholders in the field of plastic recyclates.
- Details for the methodology used for this EcoProfile can be found in the accompanying methodology publication. Datasets can be downloaded from openLCA Nexus in JSON-LD and ILCD formats.

2 MODEL DESCRIPTION

- This EcoProfile represents an average of European industry for mechanical rPP production. Data was collected from 5 sites in 2022 in Belgium, France, Germany, the Netherlands and the United Kingdom, represents the recycling of a mix of household, industrial and commercial wastes as well as ELV-WEEE wastes, and 5.58% of the European installed mechanical recycling capacity of those waste streams. The European coverage has been calculated per waste-stream, as displayed in Table 2 of the accompanying methodology document.
- The herein generated EcoProfile embodies a life cycle inventory in a 'cradle-to-gate' fashion for collection, sorting of waste, and production of PP plastic recyclate flakes. The product under investigation is 1 kg of recycled PP flakes. The main production steps in mechanical recycling are included in the system boundaries of the EcoProfile are visualised in Figure 1.

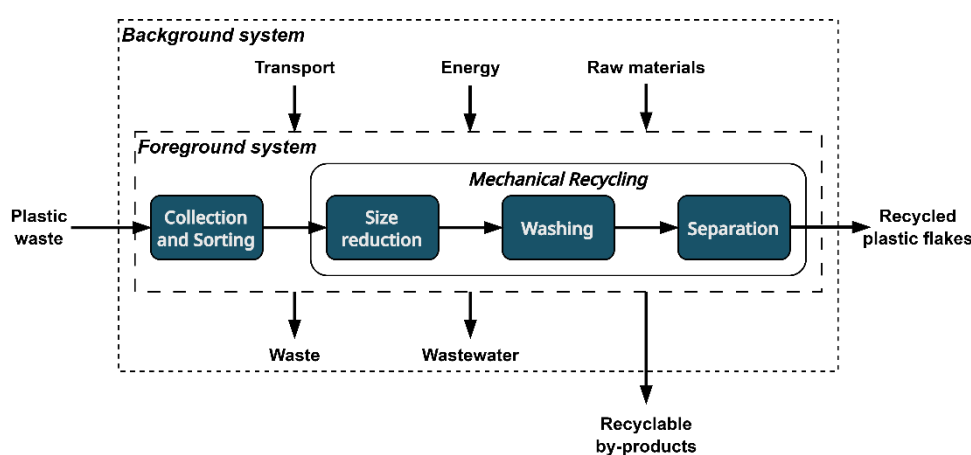


Figure 1: System description and boundaries. Following the PRE recycling scheme.

- The functional unit of the rPP EcoProfile is '**Production of 1 kg of mechanically recycled PP flakes, obtained from WEEE and household waste after collection and sorting, at gate, unpackaged, representing 5.58% of European production**' where the reference flow of the rPP EcoProfile provided is '**1 kg of rPP flakes, unpacked**'.
- Generally, a complete LCI was aimed for, though some neglectable amounts of secondary outputs had to be cut-off. For multi-output processes, physical allocation was used, as described in our methodology.
- The collected primary data was combined with secondary data (for transport, energy, chemicals, and water) from the ecoinvent 3.10 cut-off LCA database. The life cycle inventory and impacts were calculated using the CED and EF 3.1 method.

3 LCI RESULTS

Table 1. Summary of material and energy in- and outputs of an exemplary secondary material production process for recycled PP flakes with a cradle-to-gate boundary

Incoming Material	Flow Quantities per 1 kg
Mixed plastic waste including impurities ¹	1.88 kg
Material inputs	
chemical, organic	3.00E-04 kg
Cleaning consumables, with water	5.01E-05 kg
containerboard, linerboard	5.90E-04 kg
fleece, polyethylene	9.42E-09 kg
magnesium sulfate	1.23E-03 kg
polydimethylsiloxane	6.59E-05 kg
polyethylene, high density, granulate	5.20E-04 kg
polyethylene, low density, granulate	3.15E-02 kg
polypropylene, granulate	7.90E-04 kg
sodium chloride, powder	1.18E-03 kg
sodium hydroxide, without water, in 50% solution state	5.23E-05 kg
steel, low-alloyed	1.06E-02 kg
tin plated chromium steel sheet, 2 mm	6.47E-05 m ²
waste collection lorry, 21 metric ton	3.32E-08 Item(s)
Service inputs	
drawing of pipe, steel	5.76E-05 kg
extrusion, plastic film	3.19E-02 kg
injection moulding	5.20E-04 kg
wire drawing, steel	1.06E-02 kg
Water consumption	
tap water	0.338 kg
Energy	
diesel, burned in building machine	0.164 MJ
electricity, low voltage	1.63 MJ
heat, central or small-scale, other than natural gas	5.78E-02 MJ
heat, district or industrial, natural gas	0.258 MJ
Infrastructure	
waste preparation facility	5.77E-09 Item(s)
Transportation	
municipal waste collection service by 21 metric ton lorry	2.72E-03 t*km
Transport, forklift, propane-driven	4.11E-05 t*km
transport, freight, lorry 16-32 metric ton, EURO3	2.54E-02 t*km
transport, freight, lorry 16-32 metric ton, EURO4	1.59E-02 t*km
transport, freight, lorry 16-32 metric ton, EURO5	0.174 t*km
transport, freight, lorry 16-32 metric ton, EURO6	2.99E-02 t*km
transport, freight, lorry, unspecified	3.95E-02 t*km
transport, passenger car	128.6 t*km
Solid Waste	
municipal solid waste	0.674 kg
raw sludge	0.195 kg
waste plastic, mixture	5.66E-03 kg
Secondary material outputs	
Waste fraction - diverse - recycling cut-off	3.16E-03 kg
Waste fraction - metal - recycling cut-off	1.98E-02 kg
Wastewater treatment	
wastewater, average	2.80E-04 m ³
Probability to litter plastic	
plastic litter	1.44E-03 kg

¹ This value expresses an aggregation of all polymer waste streams contributing to the EcoProfile inputs. Please find the disaggregated input values per-waste stream in the disaggregated datasets.

Table 2. Primary energy demand by carrier using CED method for an exemplary secondary material production process for recycled PP flakes with a cradle-to-gate boundary

Energy carrier	Total energy input for 1kg of rPP flakes
<i>Oil, crude</i>	3.35 MJ-Eq
<i>Gas, natural</i>	2.64 MJ-Eq
<i>Uranium</i>	1.89 MJ-Eq
<i>Coal, hard</i>	1.36 MJ-Eq
<i>Coal, brown</i>	0.56 MJ-Eq
Energy resources: non-renewable	9.83 MJ-Eq
Energy resources: renewable	1.23 MJ-Eq
Total	11.06 MJ-Eq

4 LCIA RESULTS

Table 3. Life cycle impacts of the cradle-to-gate rPP model related to 1 kg of flakes

Impact Category	Impact assessment²	Unit
<i>Acidification</i>	2.52E-03 ± 5.27E-04	mol H ⁺ -Eq
<i>Climate change</i>	1.14 ± 0.15	kg CO ₂ -Eq
<i>Ecotoxicity: freshwater</i>	7.38 ± 1.28	CTUe
<i>Energy resources: non-renewable</i>	9.27 ± 2.88	MJ, net calorific value
<i>Eutrophication: freshwater</i>	2.50E-04 ± 3.57E-05	kg P-Eq
<i>Eutrophication: marine</i>	1.01E-03 ± 1.37E-04	kg N-Eq
<i>Eutrophication: terrestrial</i>	6.22E-03 ± 1.35E-03	mol N-Eq
<i>Human toxicity: carcinogenic</i>	5.23E-09 ± 2.71E-09	CTUh
<i>Human toxicity: non-carcinogenic</i>	1.15E-08 ± 1.76E-09	CTUh
<i>Ionising radiation: human health</i>	0.108 ± 0.013	kBq U235-Eq
<i>Land use</i>	4.96 ± 2.84	dimensionless
<i>Material resources: metals/minerals</i>	5.11E-06 ± 1.61E-06	kg Sb-Eq
<i>Ozone depletion</i>	8.54E-08 ± 9.34E-09	kg CFC-11-Eq
<i>Particulate matter formation</i>	3.68E-08 ± 7.66E-09	disease incidence
<i>Photochemical oxidant formation: human health</i>	2.46E-03 ± 6.71E-04	kg NMVOC-Eq
<i>Plastic litter</i>	3.73E-02 ± 3.07E-03	kg
<i>Water use</i>	0.230 ± 0.047	m ³ world Eq deprived

² The uncertainty value presented here has been calculated on the foreground data. Details are described in the methodology.